



### Key Features

High gloss acrylic surface

Scratch and stain resistant

Easy to step over threshold

Fiberglass Composite materials  
3" diameter feet

### Available Sizes

#### Raised Outlet (AFR):

- 54" x 30" x 5½"
- 54" x 27" x 5½"
- 48" x 30" x 5½"




### Standard Features

- Spacious slip resistant area
- Scratch and stain resistant
- Flange screws direct-to-stud, no predrilling or clips required
- Robotically sprayed fiberglass resin, composite materials and 3" diameter feet for structural strength
- Covered with protective film to maintain finish and protect during installation
- 5-year consumer, 2-year commercial limited warranty
- Meets ANSI and CSA standards

### Ordering Information

Description	Dimensions	SKU	Shipping Weight
Elite™ Shower Base AFR Center Drain	54" x 30" x 5½"	LEBLxx543055C	34 lbs
Elite™ Shower Base AFR L or R Drain	54" x 27" x 5½"	LEBLxx542755 L or R	32 lbs
Elite™ Shower Base AFR Center Drain	54" x 27" x 5½"	LEBLxx542755C	32 lbs
Elite™ Shower Base AFR Center Drain	48" x 30" x 5½"	LEBLxx483055C	28 lbs


#### Color Options\* (color code replaces "xx" in SKU)

-  01 - White
-  02 - Almond
-  09 - Biscuit


\*Colors shown may vary slightly from the actual product due to variations in the printing process of this document.

Plumbing accessories not included.


54" x 30"  
AFR

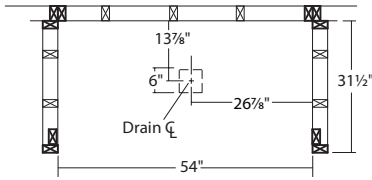


☒ = required stud location  
☒ = suggested stud location

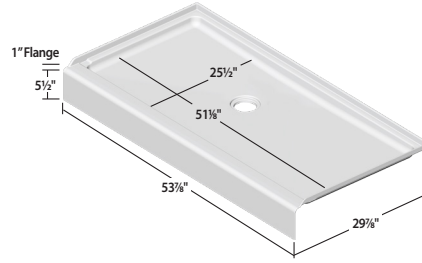


54" x 27"  
AFR

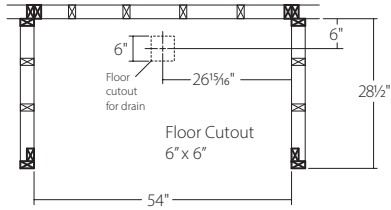


☒ = required stud location  
☒ = suggested stud location

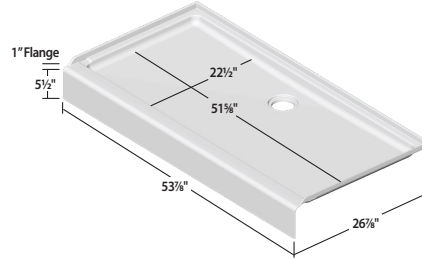


54" x 27"  
AFR

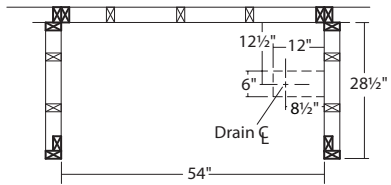


☒ = required stud location  
☒ = suggested stud location

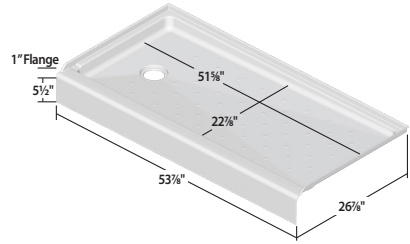

48" x 30"  
AFR

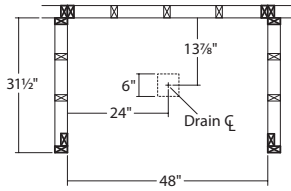

☒ = required stud location  
☒ = suggested stud location

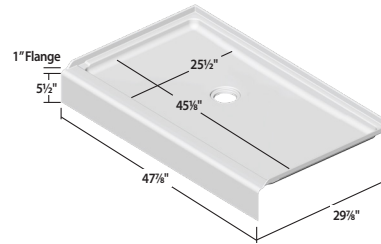

Max Door Threshold Width 3"

**Contact Us**  
 Lyons Industries, Inc.  
 30000 M-62 West  
 Dowagiac, MI 49047  
 (800) 458-9036  
 (269) 782-5159  
 lyonsind@lyonsindustries.com  
 www.lyonsindustries.com

Design and features may change without notice.  
 Complies with ANSI Z124.6 and CAN/CSA-B45.5  
 All product subject to manufacturing tolerance of [+ ] or [- ] 1/8"  
 05-2023